




King Slide® — 2X*A7 (X*=2A / 2B / 2C / 2D ; The drawings below are for assembling only. The real object should be considered as final.)

Before installation, check the Cable Management Arm (CMA) installation direction and switch the CMA connector.

1. Press "PUSH" button.
2. Spin 180 degree to change the direction.




Basket size:



Cable Management Arm Installation


1. Install the inner member

Install (A) onto (B).

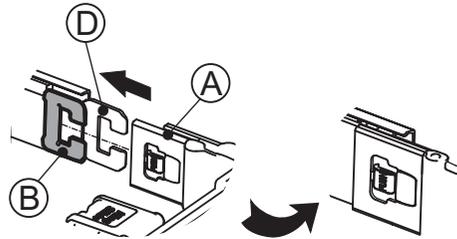



2. Install the outer member

Install (C) onto (D).

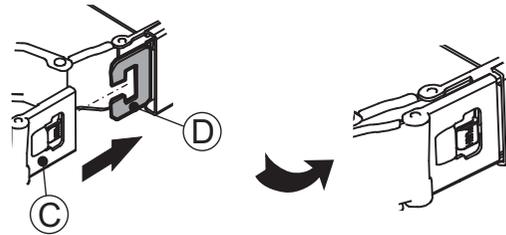


3. Install the outer member

Install (E) onto (F).

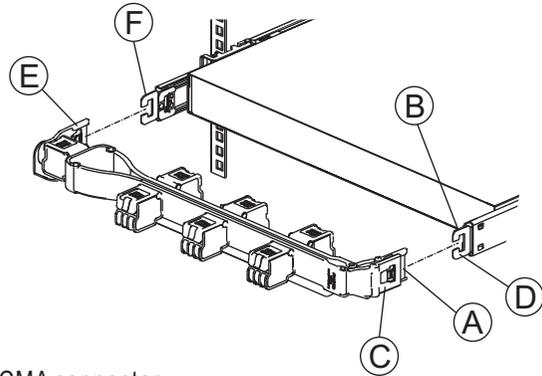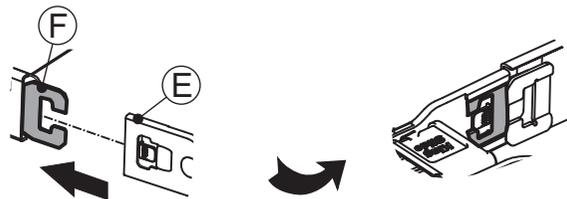

- A = CMA connector
- B = CMA connector base on inner member
- C = CMA connector
- D = CMA connector base on outer member
- E = CMA connector beside the center CMA body
- F = CMA connector base on outer member

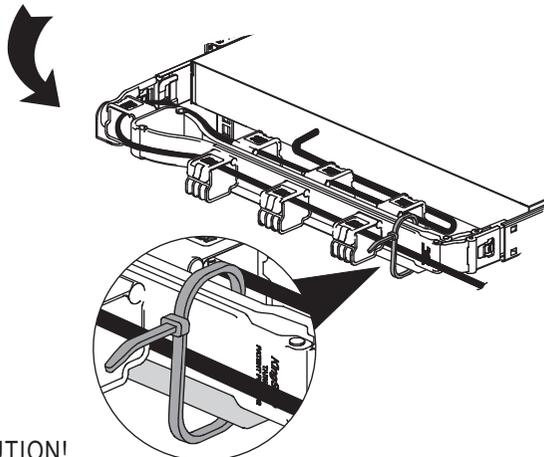


CAUTION!
Loop strap must be tied to the CMA crossbar. This is a transportation accessory; Remove the loop strap after the system arrives at the final destination.

Cable Management Arm Release


(1) Release the outer member

Press the "PUSH" button on the CMA plug-in part to draw it out.

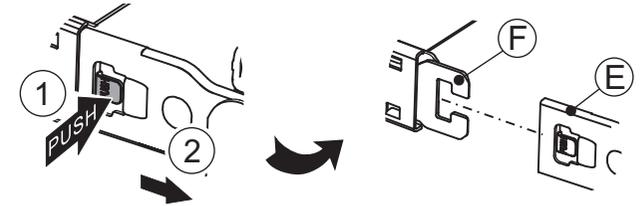

(2) Release the outer member

(A) Turn CMA 90 degree to the right hand side to maintain the chassis or resume the removal.
(B) Press the "PUSH" button on the CMA plug-in part to draw it out.

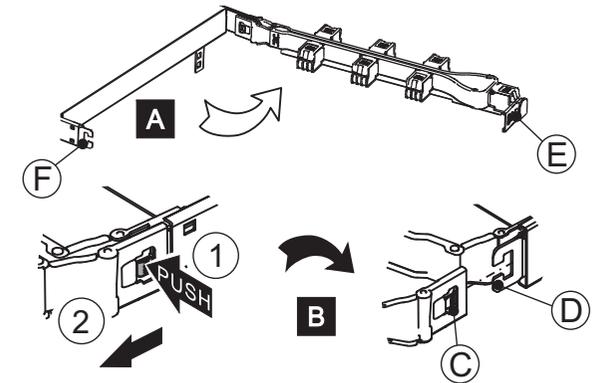

(3) Release the inner member

Press the "PUSH" button on the CMA plug-in part to draw it out.

